

GREASE SEPARATOR ECODEPUR[®] GORTECH[®] NS2

TECHNICAL INFORMATION


ECODEPUR[®] GORTECH[®] Grease Separators are totally watertight, appropriated to separate greases and oils of vegetable and animal origin from wastewater.



ECODEPUR[®] GORTECH[®] Grease Separators has CE marking, in accordance with the legal obligations that stems from the entry into force of the Regulation (UE) N.º 305/2011 of Construction Products, fulfilling all the requisites of the **European Standard EN 1825- 1**.

EUROPEAN STANDARD	EN 1825-1:2004/AC
EQUIPMENT IDENTIFICATION	Grease Separator
MARK	ECODEPUR [®]
MODEL	GORTECH [®] NS2
NOMINAL SIZE	2 l/s
SURFACE OF GREASE SEPARATION ZONE	1,30 m ² ⁽¹⁾
VOLUME OF GREASE SEPARATION ZONE	510 l ⁽¹⁾
VOLUME OF GREASE COLLECTION AREA	250 l ⁽¹⁾
FIRE CLASS REACTION	F
MATERIAL	Linear Polyethylene
SLUDE TRAP	Included (490 l) ⁽¹⁾
VENT POINT	Included (1 1/2")
COVER	Linear Polyethylene

⁽¹⁾ Volumes accordance with the legal obligations of the European Standard EN 1825- 1

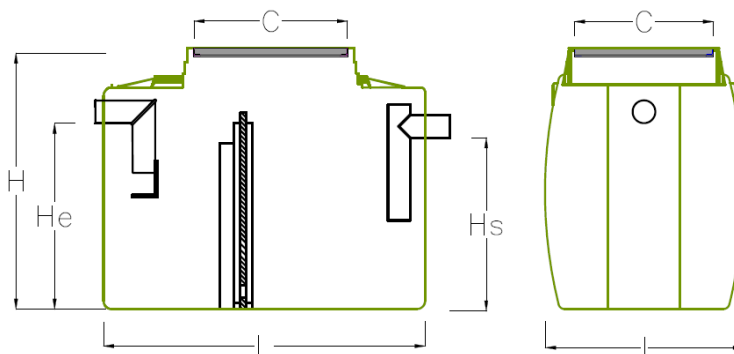

MODELO	NS (l/s)	VOLUME Total (l)	L (mm)	I (mm)	H (mm)	He (mm)	Hs (mm)	C (mm)	Ø PIPE (mm)	WEIGHT (kg)
GORTECH [®] NS 2	2	1.360	1.560	960	1.230	930	820	750 X 750	110	100